

Professional Breathalyzer



AT8801 Breathalyzer


FEATURES

- Platinum fuel cell sensor-accuracy and reliance
- Passive and active test
- Adjustable alarming threshold
- Anti-backflow mouthpiece for health and safety
- Colorful OLED indication and touch screen keyboard input
- 3.7v/2200mAh Lithium batteries
- Real temperature and time indication
- Switchable result units(mg/l, g/l, %BAC, %BAC)and temperature scale(°C, °F)
- Testing records (maximum 20000) review
- Password management
- Wireless printer and data uploading

APPLICATION

Police station, traffic management, factory, workshop, office, car, hotel, mine, etc.

STRUCTURES

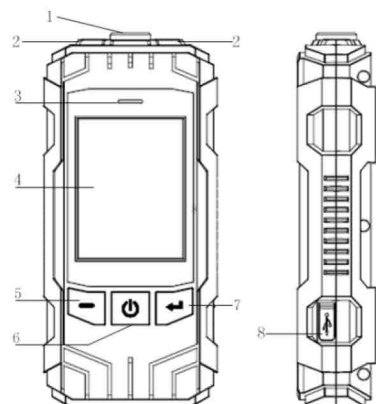

1. Air inlet
2. Light
3. Charge lamp
4. Display/touch screen
5. Function key
6. On/off /light key
7. Function key
8. Charging/communication

Note: Function key will carry the functions which indicated in left/right down side of screen.

MENU OPERATION



Menu Icon

In the standby interface shown as above, click on the menu icon on the display screen to enter the corresponding menu items. Some menu requires password validation.

SPECIFICATIONS

Sensor Type	Platinum fuel cell sensor	Display	2.8-inch touch screen
Detection Range	0.00 - 0.40%BAC, 0.00-4.00%BAC 0.00 - 2.00mg/L; 0.00 - 4.00g/L	Power	3.7v/2200mAh Lithium batteries
		Working Environment	0°C - 50°C, ≤95% RH, No dews
Accuracy	± 0.005 at 0.05%BAC	Working Time	>10 hours (full charge)
Pre-set Level	0.05%BAC; 0.50%BAC; 0.25mg/L; 0.50g/L	Charging Time	Four hours
		Dimensions	155mm*73mm*30mm @225g
Warm-up Time	<10 seconds	Records	20,000
Testing Time	< 5 Sec	Printer	Bluetooth thermal or Dot Matrix



河南火燕生物科技有限公司
Henan Huoyan Biotechnology Co., Ltd

ADD: Building B, Yingxie Square,
Jinshui District, Zhengzhou 45000,
Henan, China

Website

www.pesv.com

Phone/WhatsApp

+86-15981850611

E-mail

sales@pesv.com